


INSULATED PIPE SUPPORTS

SNAPPITZ

PVC – Urethane self-locking pipe support system



FRONT VIEW



SIDE VIEW

CLAMP SIZE						Insulation & Jacketing Length	
------------	--	--	--	--	--	-------------------------------	--

Copper Pipe Size	Iron Pipe Size	Iron Pipe Outside Diameter	Insulation OD	1/2"	1"	1 1/2"	2"	2 1/2"	4"	6"
1/2" - 5/8"				1.9	2.8	3.5	4.5	-	4	-
3/4" - 7/8"	1/2"	0.840		1.9	2.8	4	5	-	4	-
1" - 1-1/8"	3/4"	1.050		2.1	2.8	4	5	-	4	-
1 1/4" - 1-3/8"	1"	1.315		2.3	3.5	4.5	5.5	-	4	-
1 1/2" - 1-5/8"	1 1/4"	1.660		2.6	3.5	5	5.5	-	4	-
	1 1/2"	1.900		2.8	4	5	6.5	-	4	-
2" - 2-1/8"		2.375		3.1	4	5	6.5	CALL	4	-
	2"	2.875		3.375	4.5	5.5	6.5	CALL	4	-
2-1/2" - 2-5/8"		3.500		3.625	4.5	5.5	6.5	CALL		6
	2 1/2"	4.000		3.875	5	6.5	7.5	CALL		6
3-1/8"		4.500		4.125	5	6.5	7.5	CALL		6
	3"	5.000		4.5	5.5	6.5	7.5	CALL		6
4-1/8"		5.563		5.125	6.5	7.5	8.5	CALL		6
	4"			5.56	6.5	7.5	8.5	CALL		6
	5"			6.625	7.6	8.57	9.5	CALL		6
6-1/8"				7.125	8.57	8.57	10.7	CALL		6
	6"			7.57	8.57	9.57	10.7	CALL		6

OD OF SNAPPITZ	CLAMP SIZE NEEDED
2.8	2.5"
3.5	3"
4	3.5"
4.5	4"
5	4.5"
5.5	5"
6.5	6"
7.5	7"
8.5	8"
9.5	9"
10.7	10"


Up to 2 1/2" pipe, Trymer has adequate compressive strength to meet the requirements of weight bearing loads at the hanger point. Insul-phen is used to accommodate the compression for the larger diameter piping system.

PVC pipe has the following smoke & flame characteristics when tested in accordance with ASTM E84-05:


Flame spread classification: 5 Smoke developed classification: 30

Standard size is 4" of insulation and jacketing for pipes 1/2" – 2-5/8".

6" jacketing & insulation is used for pipes 2 1/2" – 6".

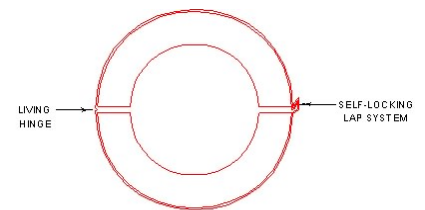

CLOSED POSITION



OPEN POSITION

KB Enterprises

Anaconda, MT

SNAPPITZ

INSULATED PIPE SUPPORTS

Patent Pending

DESCRIPTION:

SNAPPITZ are a revolutionary pipe support constructed of a self-locking PVC jacket. The insulation varies from Trymer Urethane or Insul-phen and are adhered inside a 360° PVC jacket. Snappitz are a user friendly product and are cleaner & more user friendly than calcium silicate.

ADVANTAGES:

- Faster to install. With the Snappitz patented jacketing system, they can be installed in seconds.
- Snappitz are lightweight, saving shipping costs.
- Snappitz are aesthetically better as they correspond with the ASJ jacketing of the fiberglass covering.
- 100% waterproof.
- Tight sealing J-lock is a vapor barrier and does not require tape.
- Eliminates installing a separate shield.
- Allows the mechanical contractor to adjust the hanger point only once for proper pitch of pipe.
- Eliminates the insulator from raising or lowering insulation system.
- Snappitz insulated pipe supports have a consistent outside diameter that does not vary, do the Unistrut clamp fits the OD every time.

USES:

- Cold Water
- Air
- Dual Temperature
- Hot Water
- Chilled Water Heating
- Clean Room Application
- Process Piping